

## DirectPath™, 2-VRMS Audio Line Driver With Adjustable Gain

Check for Samples: [DRV632](#)

### FEATURES

- **Stereo DirectPath™ Audio Line Driver**
  - 2 Vrms Into 10 kΩ With 3.3-V Supply
- **Low THD+N < 0.01% at 2 Vrms Into 10 kΩ**
- **High SNR, >90 dB**
- **600-Ω Output Load Compliant**
- **Differential Input and Single-Ended Output**
- **Adjustable Gain by External Gain-Setting Resistors**
- **Low DC Offset, <1 mV**
- **Ground-Referenced Outputs Eliminate DC-Blocking Capacitors**
  - Reduce Board Area
  - Reduce Component Cost
  - Improve THD+N Performance
  - No Degradation of Low-Frequency Response Due to Output Capacitors
- **Short-Circuit Protection**
- **Click- and Pop-Reduction Circuitry**
- **External Undervoltage Mute**
- **Active Mute Control for Pop-Free Audio On/Off Control**
- **Space-Saving TSSOP Package**

### APPLICATIONS

- **Set-Top Boxes**
- **Blu-ray Disc™, DVD Players**
- **LCD and PDP TV**
- **Mini/Micro Combo Systems**
- **Sound Cards**
- **Laptops**

### DESCRIPTION

The DRV632 is a 2- $V_{RMS}$  pop-free stereo line driver designed to allow the removal of the output dc-blocking capacitors for reduced component count and cost. The device is ideal for single-supply electronics where size and cost are critical design parameters.

Designed using TI's patented DirectPath™ technology, The DRV632 is capable of driving 2  $V_{RMS}$  into a 10-kΩ load with 3.3-V supply voltage. The device has differential inputs and uses external gain-setting resistors to support a gain range of  $\pm 1$  V/V to  $\pm 10$  V/V, and gain can be configured individually for each channel. Line outputs have  $\pm 8$ -kV IEC ESD protection, requiring just a simple resistor-capacitor ESD protection circuit. The DRV632 has built-in active-mute control for pop-free audio on/off control. The DRV632 has an external undervoltage detector that mutes the output when the power supply is removed, ensuring a pop-free shutdown.

Using the DRV632 in audio products can reduce component count considerably compared to traditional methods of generating a 2- $V_{RMS}$  output. The DRV632 does not require a power supply greater than 3.3 V to generate its 5.6- $V_{pp}$  output, nor does it require a split-rail power supply. The DRV632 integrates its own charge pump to generate a negative supply rail that provides a clean, pop-free ground-biased 2- $V_{RMS}$  output.

The DRV632 is available in a 14-pin TSSOP.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

DirectPath, FilterPro are trademarks of Texas Instruments.  
Blu-ray Disc is a trademark of Blu-ray Disc Association.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### ORDERING INFORMATION<sup>(1)</sup>

| T <sub>A</sub> | PACKAGE  | DESCRIPTION |
|----------------|----------|-------------|
| –40°C to 85°C  | DRV632PW | 14-Pin      |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at [www.ti.com](http://www.ti.com).

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

over operating free-air temperature range

|                                                                   | VALUE                              | UNIT |
|-------------------------------------------------------------------|------------------------------------|------|
| Supply voltage, VDD to GND                                        | –0.3 to 4                          | V    |
| V <sub>I</sub> Input voltage                                      | V <sub>SS</sub> – 0.3 to VDD + 0.3 | V    |
| R <sub>L</sub> Minimum load impedance – line outputs – OUTL, OUTR | 600                                | Ω    |
| Mute to GND, UVP to GND                                           | –0.3 to VDD + 0.3                  | V    |
| T <sub>J</sub> Maximum operating junction temperature range       | –40 to 150                         | °C   |
| T <sub>stg</sub> Storage temperature range                        | –40 to 150                         | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### THERMAL INFORMATION

| THERMAL METRIC <sup>(1)</sup> |                                                             | DRV632  | UNIT |
|-------------------------------|-------------------------------------------------------------|---------|------|
|                               |                                                             | PW      |      |
|                               |                                                             | 14 PINS |      |
| θ <sub>JA</sub>               | Junction-to-ambient thermal resistance <sup>(2)</sup>       | 130     | °C/W |
| θ <sub>JCTop</sub>            | Junction-to-case (top) thermal resistance <sup>(3)</sup>    | 49      | °C/W |
| θ <sub>JB</sub>               | Junction-to-board thermal resistance <sup>(4)</sup>         | 63      | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter <sup>(5)</sup>   | 3.6     | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter <sup>(6)</sup> | 62      | °C/W |
| θ <sub>JCbot</sub>            | Junction-to-case (bottom) thermal resistance <sup>(7)</sup> | n/a     | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).  
 (2) The junction-to-ambient thermal resistance under natural convection is obtained in a simulation on a JEDEC-standard, high-K board, as specified in JESD51-7, in an environment described in JESD51-2a.  
 (3) The junction-to-case (top) thermal resistance is obtained by simulating a cold plate test on the package top. No specific JEDEC-standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.  
 (4) The junction-to-board thermal resistance is obtained by simulating in an environment with a ring cold plate fixture to control the PCB temperature, as described in JESD51-8.  
 (5) The junction-to-top characterization parameter, ψ<sub>JT</sub>, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining θ<sub>JA</sub>, using a procedure described in JESD51-2a (sections 6 and 7).  
 (6) The junction-to-board characterization parameter, ψ<sub>JB</sub>, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining θ<sub>JA</sub>, using a procedure described in JESD51-2a (sections 6 and 7).  
 (7) The junction-to-case (bottom) thermal resistance is obtained by simulating a cold plate test on the exposed (power) pad. No specific JEDEC standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.

## RECOMMENDED OPERATING CONDITIONS

|                 |                                |                          | MIN | NOM | MAX | UNIT     |
|-----------------|--------------------------------|--------------------------|-----|-----|-----|----------|
| VDD             | Supply voltage                 | DC supply voltage        | 3   | 3.3 | 3.6 | V        |
| R <sub>L</sub>  | Load impedance                 |                          | 0.6 | 10  |     | kΩ       |
| V <sub>IL</sub> | Low-level input voltage        | $\overline{\text{Mute}}$ |     | 40  |     | % of VDD |
| V <sub>IH</sub> | High-level input voltage       | $\overline{\text{Mute}}$ |     | 60  |     | % of VDD |
| T <sub>A</sub>  | Operating free-air temperature |                          | –40 | 25  | 85  | °C       |

## ELECTRICAL CHARACTERISTICS

T<sub>A</sub> = 25°C (unless otherwise noted)


| PARAMETER                     |                                                    | TEST CONDITIONS                                                | MIN | TYP  | MAX   | UNIT |
|-------------------------------|----------------------------------------------------|----------------------------------------------------------------|-----|------|-------|------|
| V <sub>OS</sub>               | Output offset voltage                              | VDD = 3.3 V                                                    |     | 0.5  | 1     | mV   |
| PSRR                          | Power-supply rejection ratio                       |                                                                |     | 80   |       | dB   |
| V <sub>OH</sub>               | High-level output voltage                          | VDD = 3.3 V                                                    | 3.1 |      |       | V    |
| V <sub>OL</sub>               | Low-level output voltage                           | VDD = 3.3 V                                                    |     |      | −3.05 | V    |
| V <sub>UVP_EX</sub>           | External UVP detect voltage                        |                                                                |     | 1.25 |       | V    |
| V <sub>UVP_EX_HYSTERSIS</sub> | External UVP detect hysteresis current             |                                                                |     | 5    |       | μA   |
| f <sub>CP</sub>               | Charge pump switching frequency                    |                                                                | 200 | 300  | 400   | kHz  |
| I <sub>IH</sub>               | High-level input current, $\overline{\text{Mute}}$ | VDD = 3.3 V, V <sub>IH</sub> = VDD                             |     |      | 1     | μA   |
| I <sub>IL</sub>               | Low-level input current, $\overline{\text{Mute}}$  | VDD = 3.3 V, V <sub>IL</sub> = 0 V                             |     |      | 1     | μA   |
| I <sub>DD</sub>               | Supply current                                     | VDD = 3.3 V, no load, $\overline{\text{Mute}}$ = VDD           | 5   | 14   | 25    | mA   |
|                               |                                                    | VDD = 3.3 V, no load, $\overline{\text{Mute}}$ = GND, disabled |     | 14   |       |      |

## OPERATING CHARACTERISTICS

VDD = 3.3 V, R<sub>DL</sub> = 10 kΩ, R<sub>FB</sub> = 30 kΩ, R<sub>IN</sub> = 15 kΩ, T<sub>A</sub> = 25°C, Charge pump: C<sub>P</sub> = 1 μF (unless otherwise noted)

| PARAMETER          | TEST CONDITIONS                        | MIN                                                        | TYP    | MAX | UNIT             |
|--------------------|----------------------------------------|------------------------------------------------------------|--------|-----|------------------|
| V <sub>O</sub>     | Output voltage, outputs in phase       | THD+N = 1%, VDD = 3.3 V, f = 1 kHz, R <sub>L</sub> = 10 kΩ | 2      | 2.4 | V <sub>rms</sub> |
| THD+N              | Total harmonic distortion plus noise   | V <sub>O</sub> = 2 V <sub>RMS</sub> , f = 1 kHz            | 0.002% |     |                  |
| SNR                | Signal-to-noise ratio <sup>(1)</sup>   | A-weighted                                                 | 90     | 105 | dB               |
| DNR                | Dynamic range                          | A-weighted                                                 | 90     | 105 | dB               |
| V <sub>N</sub>     | Noise voltage                          | A-weighted                                                 | 11     |     | μV               |
| Z <sub>O</sub>     | Output Impedance when muted            | $\overline{\text{Mute}}$ = GND                             | 110    |     | mΩ               |
|                    | Input-to-output attenuation when muted | $\overline{\text{Mute}}$ = GND                             | 80     |     | dB               |
|                    | Crosstalk—L to R, R to L               | V <sub>O</sub> = 1 V <sub>rms</sub>                        | –110   |     | dB               |
| I <sub>LIMIT</sub> | Current limit                          |                                                            | 25     |     | mA               |

(1) SNR is calculated relative to 2-V<sub>rms</sub> output.

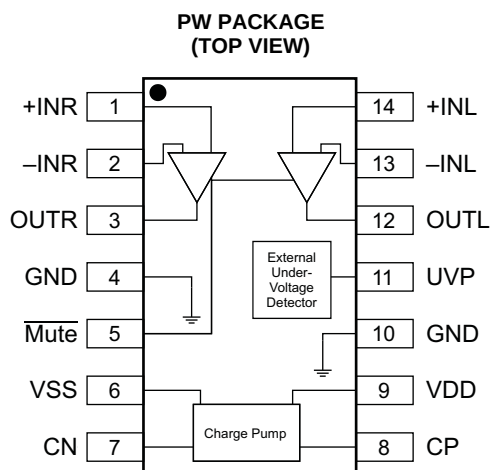


### PIN FUNCTIONS

| PIN  |       | I/O <sup>(1)</sup> | DESCRIPTION                                                                           |
|------|-------|--------------------|---------------------------------------------------------------------------------------|
| NAME | NO.   |                    |                                                                                       |
| CN   | 7     | I/O                | Charge-pump flying capacitor negative connection                                      |
| CP   | 8     | I/O                | Charge-pump flying capacitor positive connection                                      |
| GND  | 4, 10 | P                  | Ground                                                                                |
| -INL | 13    | I                  | Left-channel OPAMP negative input                                                     |
| +INL | 14    | I                  | Left-channel OPAMP positive input                                                     |
| -INR | 2     | I                  | Right-channel OPAMP negative input                                                    |
| +INR | 1     | I                  | Right-channel OPAMP positive input                                                    |
| Mute | 5     | I                  | Mute, active-low                                                                      |
| OUTL | 12    | O                  | Left-channel OPAMP output                                                             |
| OUTR | 3     | O                  | Right-channel OPAMP output                                                            |
| UVP  | 11    | I                  | Undervoltage protection; connect to PVDD with a 10-kΩ resistor if function is unused. |
| VDD  | 9     | P                  | Positive supply                                                                       |
| VSS  | 6     | P                  | Supply voltage                                                                        |

(1) I = input, O = output, P = power

## FUNCTIONAL BLOCK DIAGRAM

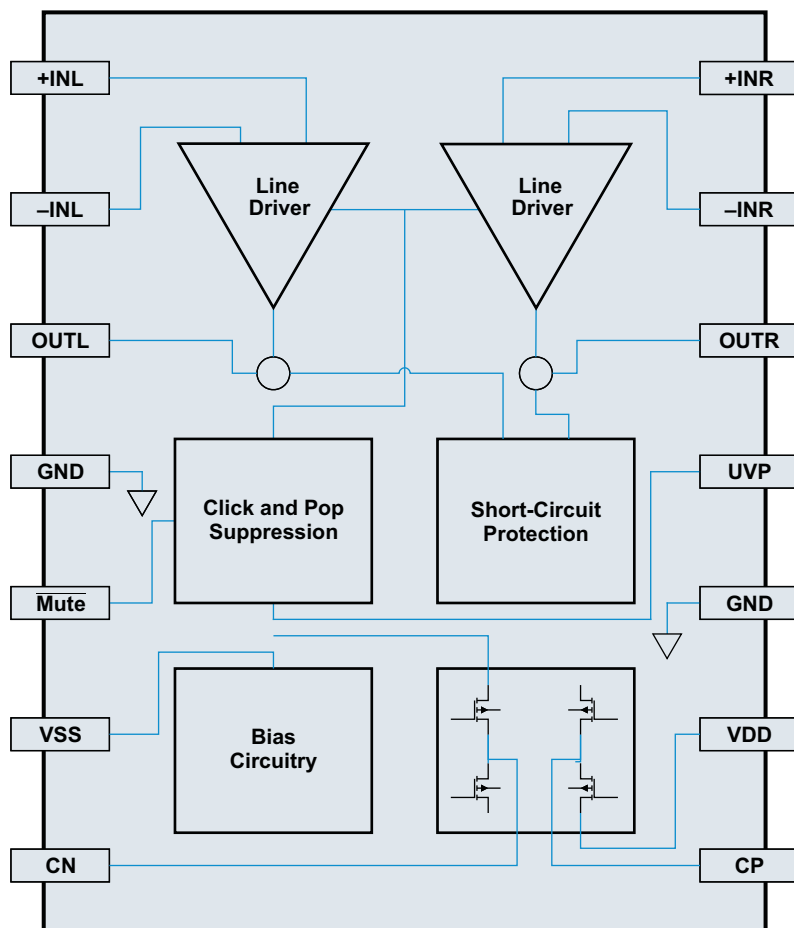

## TYPICAL CHARACTERISTICS

$V_{DD} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $C_{(PUMP)} = C_{(VSS)} = 1\text{ }\mu\text{F}$ ,  $C_{IN} = 2.2\text{ }\mu\text{F}$ ,  $R_{IN} = 15\text{ k}\Omega$ ,  $R_{fb} = 30\text{ k}\Omega$ ,  $R_{OUT} = 32\text{ }\Omega$ ,  $C_{OUT} = 1\text{ nF}$  (unless otherwise noted)

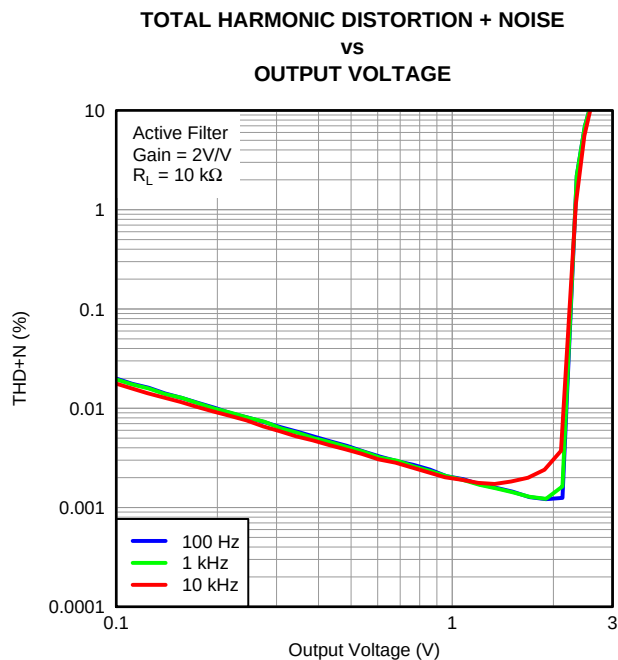


Figure 1.

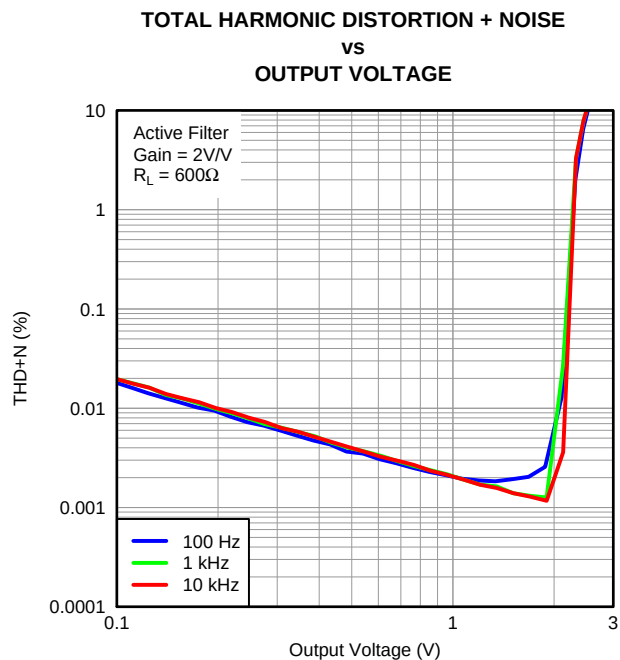


Figure 2.

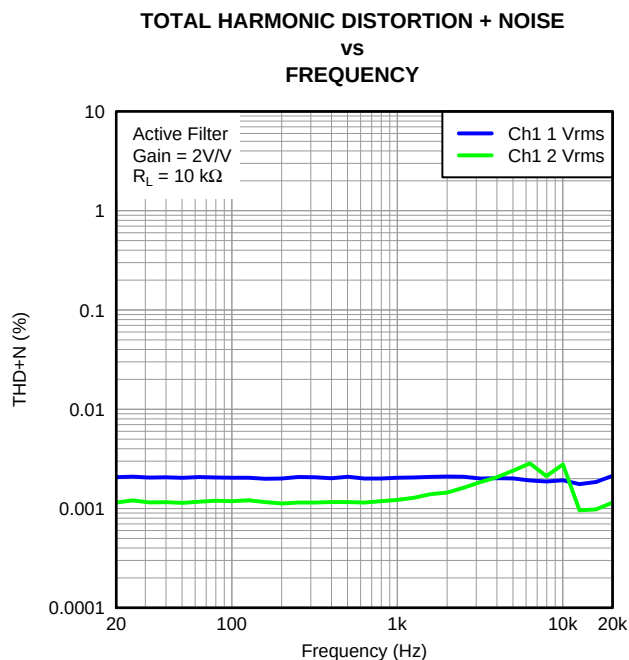


Figure 3.


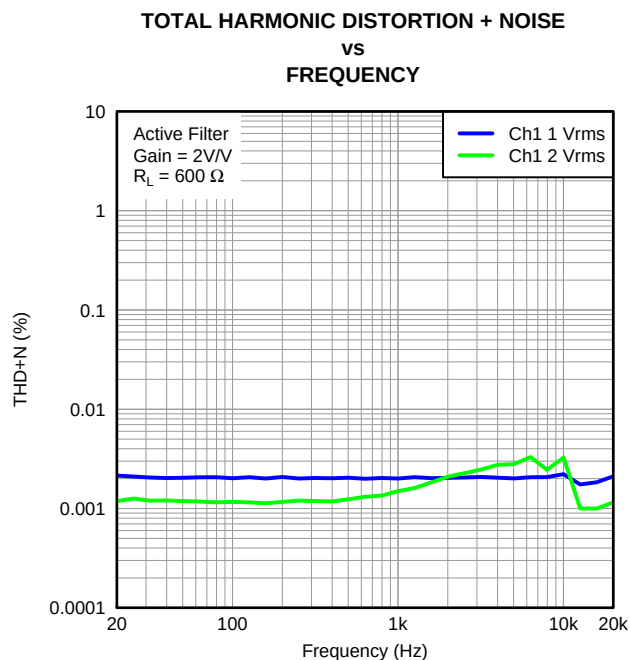


Figure 4.

## TYPICAL CHARACTERISTICS (continued)

VDD = 3.3 V, T<sub>A</sub> = 25°C, C<sub>(PUMP)</sub> = C<sub>(VSS)</sub> = 1 μF, C<sub>IN</sub> = 2.2 μF, R<sub>IN</sub> = 15 kΩ, R<sub>fb</sub> = 30 kΩ, R<sub>OUT</sub> = 32 Ω, C<sub>OUT</sub> = 1 nF (unless otherwise noted)

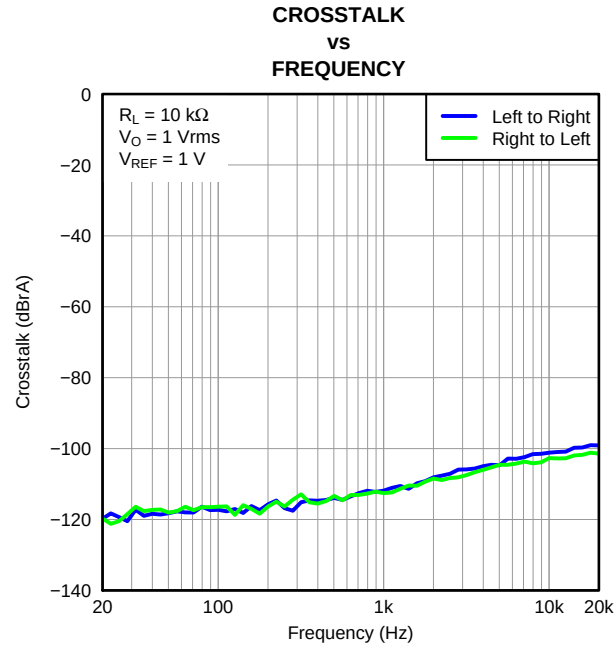

**Figure 5.**

## APPLICATION INFORMATION

### LINE DRIVER AMPLIFIERS


Single-supply line-driver amplifiers typically require dc-blocking capacitors. The top drawing in [Figure 6](#) illustrates the conventional line-driver amplifier connection to the load and output signal. DC blocking capacitors are often large in value. The line load (typical resistive values of 600  $\Omega$  to 10 k $\Omega$ ) combines with the dc blocking capacitors to form a high-pass filter. [Equation 1](#) shows the relationship between the load impedance ( $R_L$ ), the capacitor ( $C_O$ ), and the cutoff frequency ( $f_c$ ).

$$f_c = \frac{1}{2\pi R_L C_O} \quad (1)$$

$C_O$  can be determined using [Equation 2](#), where the load impedance and the cutoff frequency are known.

$$C_O = \frac{1}{2\pi R_L f_c} \quad (2)$$

If  $f_c$  is low, the capacitor must then have a large value because the load resistance is small. Large capacitance values require large package sizes. Large package sizes consume PCB area, stand high above the PCB, increase cost of assembly, and can reduce the fidelity of the audio output signal.

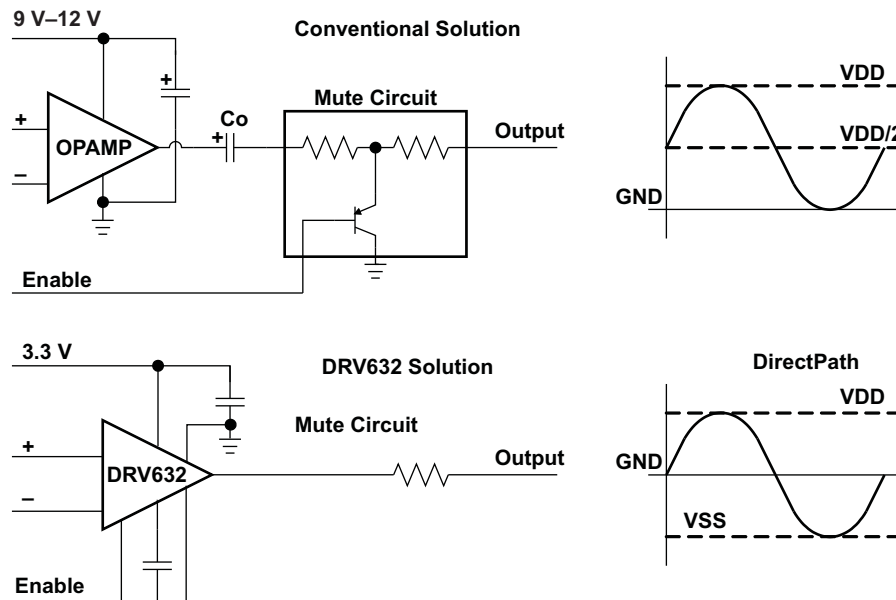

**Figure 6. Conventional and DirectPath Line Drivers**

The DirectPath amplifier architecture operates from a single supply but makes use of an internal charge pump to provide a negative voltage rail. Combining the user-provided positive rail and the negative rail generated by the IC, the device operates in what is effectively a split-supply mode. The output voltages are now centered at zero volts with the capability to swing to the positive rail or negative rail. Combining this with the built-in click and pop reduction circuit, the DirectPath amplifier requires no output dc blocking capacitors. The bottom block diagram and waveform of [Figure 6](#) illustrate the ground-referenced line-driver architecture. This is the architecture of the DRV632.



## CHARGE-PUMP FLYING CAPACITOR AND PVSS CAPACITOR

The charge-pump flying capacitor serves to transfer charge during the generation of the negative supply voltage. The PVSS capacitor must be at least equal to the charge-pump capacitor in order to allow maximum charge transfer. Low-ESR capacitors are an ideal selection, and a value of 1  $\mu\text{F}$  is typical. Capacitor values that are smaller than 1  $\mu\text{F}$  can be used, but the maximum output voltage may be reduced and the device may not operate to specifications. If the DRV632 is used in highly noise-sensitive circuits, it is recommended to add a small LC filter on the VDD connection.

## DECOUPLING CAPACITORS

The DRV632 is a DirectPath line-driver amplifier that requires adequate power supply decoupling to ensure that the noise and total harmonic distortion (THD) are low. A good, low equivalent-series-resistance (ESR) ceramic capacitor, typically 1  $\mu\text{F}$ , placed as close as possible to the device VDD lead works best. Placing this decoupling capacitor close to the DRV632 is important for the performance of the amplifier. For filtering lower-frequency noise signals, a 10- $\mu\text{F}$  or greater capacitor placed near the audio power amplifier would also help, but it is not required in most applications because of the high PSRR of this device.

## GAIN-SETTING RESISTOR RANGES

The gain-setting resistors,  $R_{\text{IN}}$  and  $R_{\text{fb}}$ , must be chosen so that noise, stability, and input capacitor size of the DRV632 are kept within acceptable limits. Voltage gain is defined as  $R_{\text{fb}}$  divided by  $R_{\text{IN}}$ .

Selecting values that are too low demands a large input ac-coupling capacitor,  $C_{\text{IN}}$ . Selecting values that are too high increases the noise of the amplifier. Table 1 lists the recommended resistor values for different inverting-input gain settings.

**Table 1. Recommended Resistor Values**

| GAIN     | INPUT RESISTOR VALUE, $R_{\text{IN}}$ | FEEDBACK RESISTOR VALUE, $R_{\text{fb}}$ |
|----------|---------------------------------------|------------------------------------------|
| -1 V/V   | 10 k $\Omega$                         | 10 k $\Omega$                            |
| -1.5 V/V | 8.2 k $\Omega$                        | 12 k $\Omega$                            |
| -2 V/V   | 15 k $\Omega$                         | 30 k $\Omega$                            |
| -10 V/V  | 4.7 k $\Omega$                        | 47 k $\Omega$                            |


## USING THE DRV632 AS A SECOND-ORDER FILTER

Several audio DACs used today require an external low-pass filter to remove out-of-band noise. This is possible with the DRV632, as it can be used like a standard operational amplifier. Several filter topologies can be implemented, both single-ended and differential. In Figure 7, multi-feedback (MFB) with differential input and single-ended input are shown.

An ac-coupling capacitor to remove dc content from the source is shown; it serves to block any dc content from the source and lowers the dc gain to 1, helping to reduce the output dc offset to a minimum.

The component values can be calculated with the help of the TI FilterPro™ program available on the TI Web site at:

<http://focus.ti.com/docs/toolsw/folders/print/filterpro.html>.

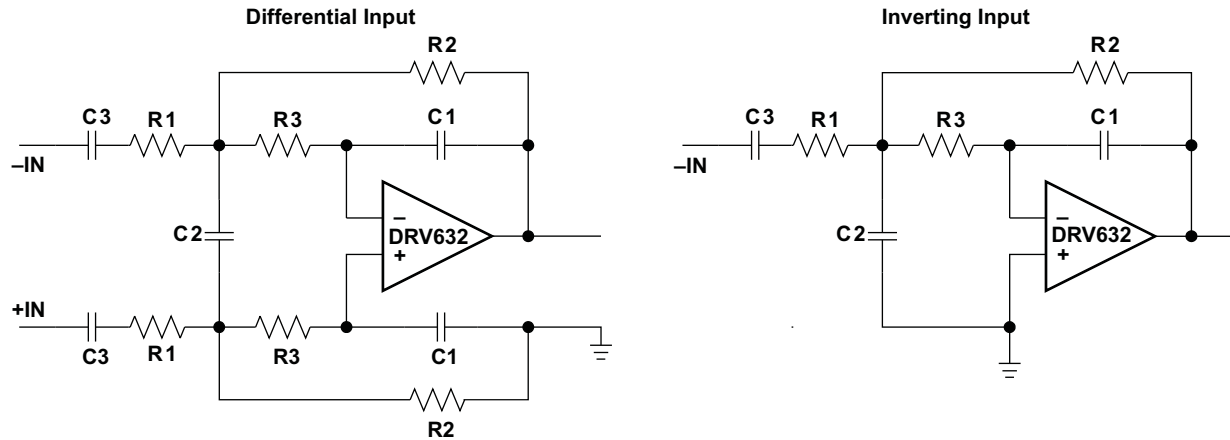

**Figure 7. Second-Order Active Low-Pass Filter**

The resistor values should have a low value for obtaining low noise, but should also have a high enough value to get a small-size ac-coupling capacitor. With the proposed values of  $R1 = 15\text{ k}\Omega$ ,  $R2 = 30\text{ k}\Omega$ , and  $R3 = 43\text{ k}\Omega$ , a dynamic range (DYR) of 106 dB can be achieved with a  $1\text{-}\mu\text{F}$  input ac-coupling capacitor.

### INPUT-BLOCKING CAPACITORS

DC input-blocking capacitors are required to be added in series with the audio signal into the input pins of the DRV632. These capacitors block the dc portion of the audio source and allow the DRV632 inputs to be properly biased to provide maximum performance.

These capacitors form a high-pass filter with the input resistor,  $R_{IN}$ . The cutoff frequency is calculated using Equation 3. For this calculation, the capacitance used is the input-blocking capacitor, and the resistance is the input resistor chosen from Table 1; then the frequency and/or capacitance can be determined when one of the two values is given.

It is recommended to use electrolytic capacitors or high-voltage-rated capacitors as input blocking capacitors to ensure minimal variation in capacitance with input voltages. Such variation in capacitance with input voltages is commonly seen in ceramic capacitors and can increase low-frequency audio distortion.

$$f_{cIN} = \frac{1}{2\pi R_{IN} C_{IN}} \quad \text{or} \quad C_{IN} = \frac{1}{2\pi f_{cIN} R_{IN}} \quad (3)$$

### DRV632 UVP OPERATION

The shutdown threshold at the UVP pin is 1.25 V. The customer must use a resistor divider to obtain the shutdown threshold and hysteresis desired for a particular application. The customer-selected thresholds can be determined as follows:

### EXTERNAL UNDERVOLTAGE DETECTION


External undervoltage detection can be used to mute/shut down the DRV632 before an input device can generate a pop.

The shutdown threshold at the UVP pin is 1.25 V. The user selects a resistor divider to obtain the shutdown threshold and hysteresis for the specific application. The thresholds can be determined as follows:

$$V_{UVP} = (1.25 - 6\text{ }\mu\text{A} \times R3) \times (R1 + R2) / R2$$

$$\text{Hysteresis} = 5\text{ }\mu\text{A} \times R3 \times (R1 + R2) / R2$$

For example, to obtain  $V_{UVP} = 3.8\text{ V}$  and 1-V hysteresis, we can use  $R1 = 3\text{ k}\Omega$ ,  $R2 = 1\text{ k}\Omega$ , and  $R3 = 50\text{ k}\Omega$ .

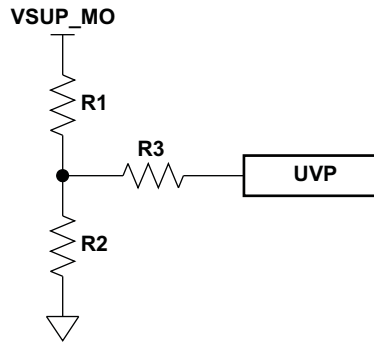


## LAYOUT RECOMMENDATIONS

A proposed layout for the DRV632 can be seen in the DRV632EVM User's Guide, and the Gerber files can be downloaded from <http://www.ti.com>. To access this information, open the DRV632 product folder and look in the Tools and Software folder.

## GAIN-SETTING RESISTORS

The gain-setting resistors,  $R_{IN}$  and  $R_{fb}$ , must be placed close to pins 13 and 17, respectively, to minimize capacitive loading on these input pins and to ensure maximum stability of the DRV632. For the recommended PCB layout, see the DRV632EVM User's Guide.

## APPLICATION CIRCUIT

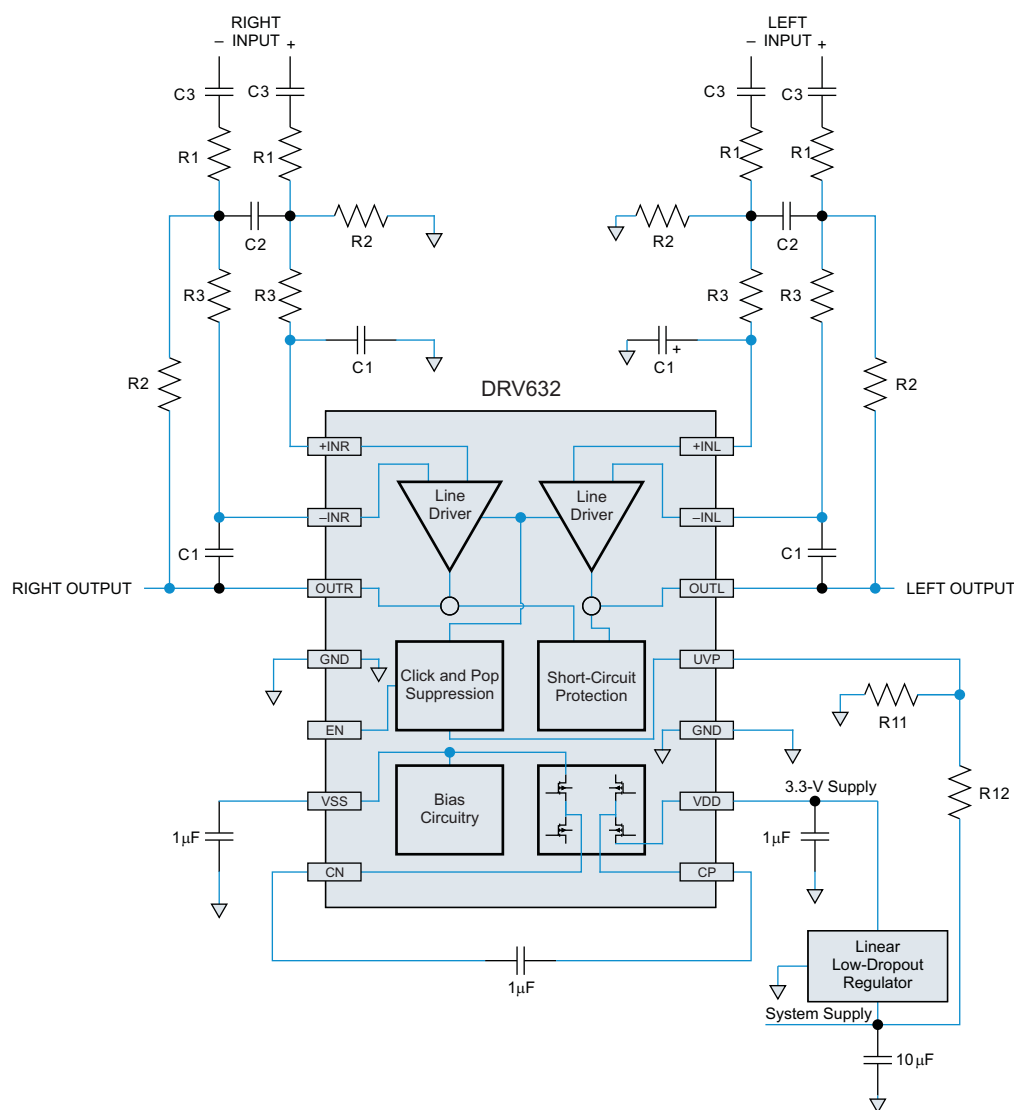

$R1 = 15\text{ k}\Omega$ ,  $R2 = 30\text{ k}\Omega$ ,  $R3 = 43\text{ k}\Omega$ ,  $C1 = 47\text{ pF}$ ,  $C2 = 180\text{ pF}$

Differential-input, single-ended output, second-order filter

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/ Ball Finish | MSL Peak Temp <sup>(3)</sup> | Samples (Requires Login)               |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|-------------------|------------------------------|----------------------------------------|
| DRV632PW         | ACTIVE                | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU         | Level-2-260C-1 YEAR          | <a href="#">Purchase Samples</a>       |
| DRV632PWR        | ACTIVE                | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU         | Level-2-260C-1 YEAR          | Contact TI Distributor or Sales Office |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.


**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

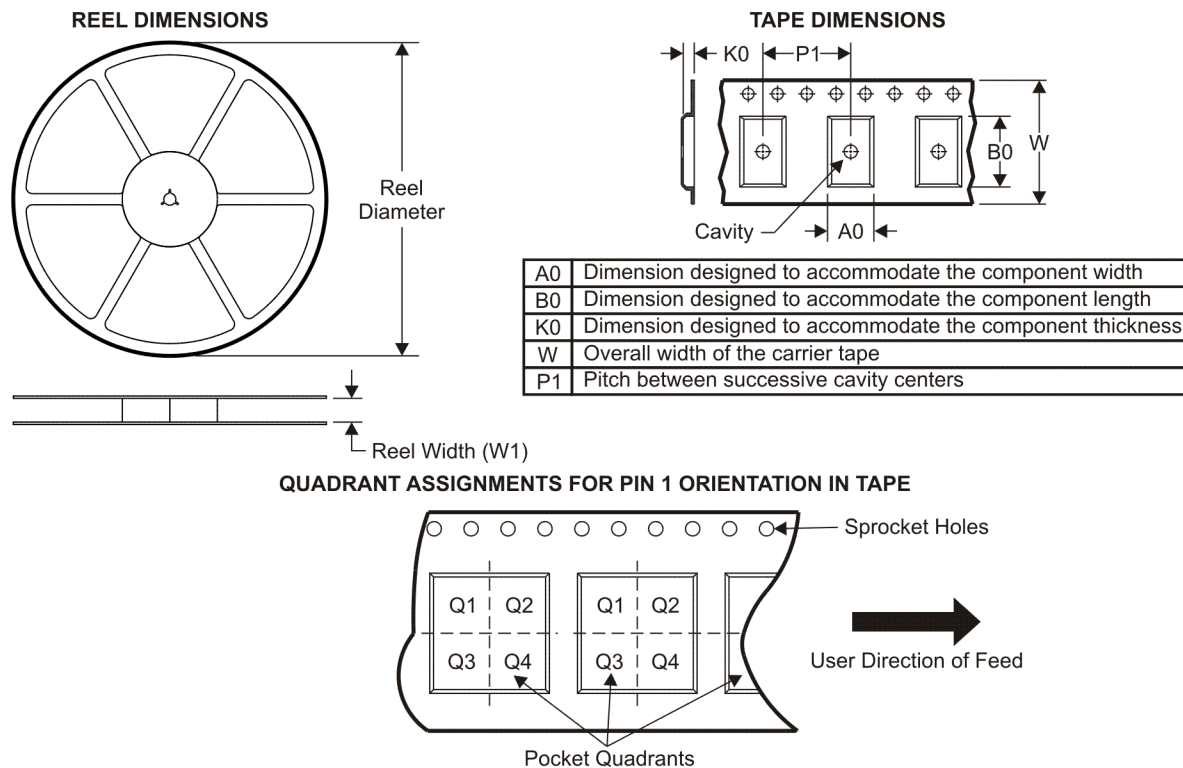

\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DRV632PWR | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

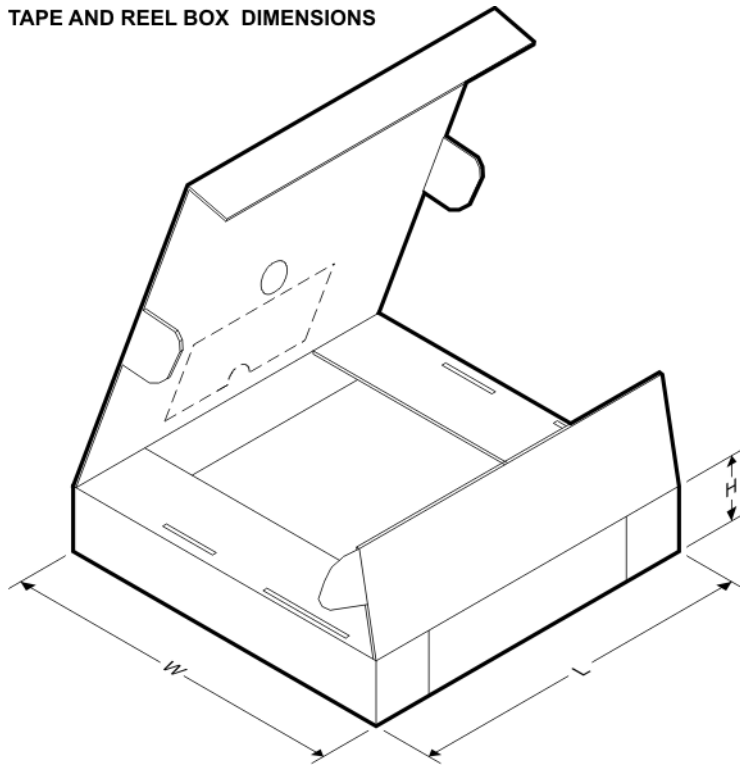


\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| DRV632PWR | TSSOP        | PW              | 14   | 2000 | 346.0       | 346.0      | 29.0        |

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

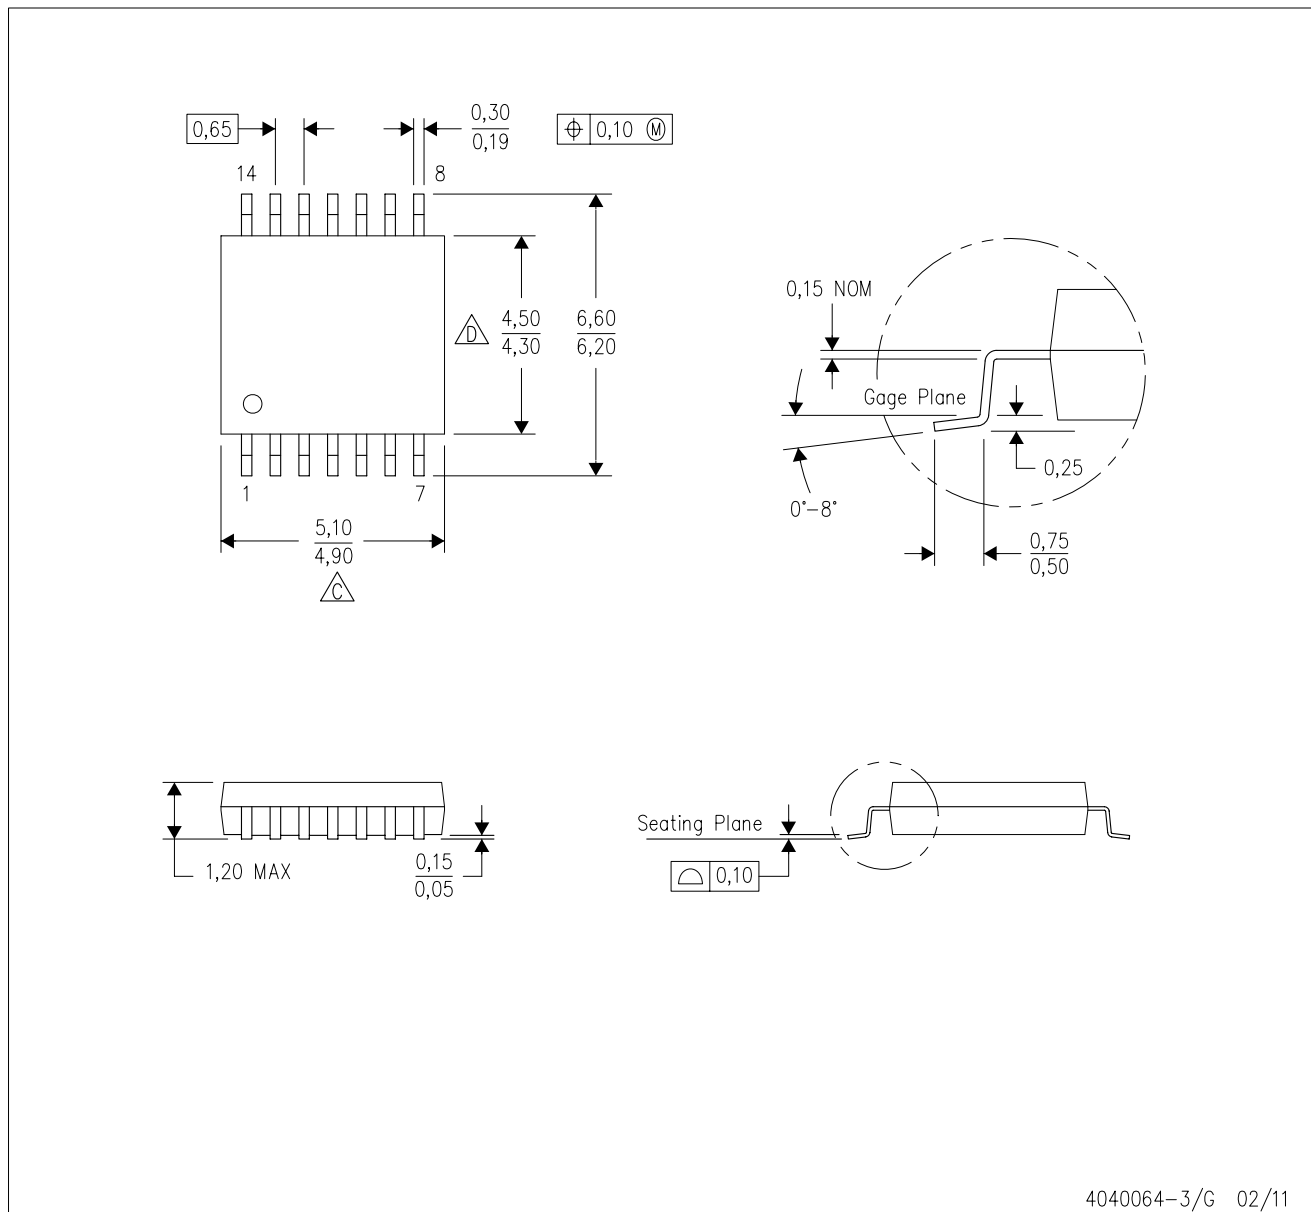


4040064-3/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153



PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

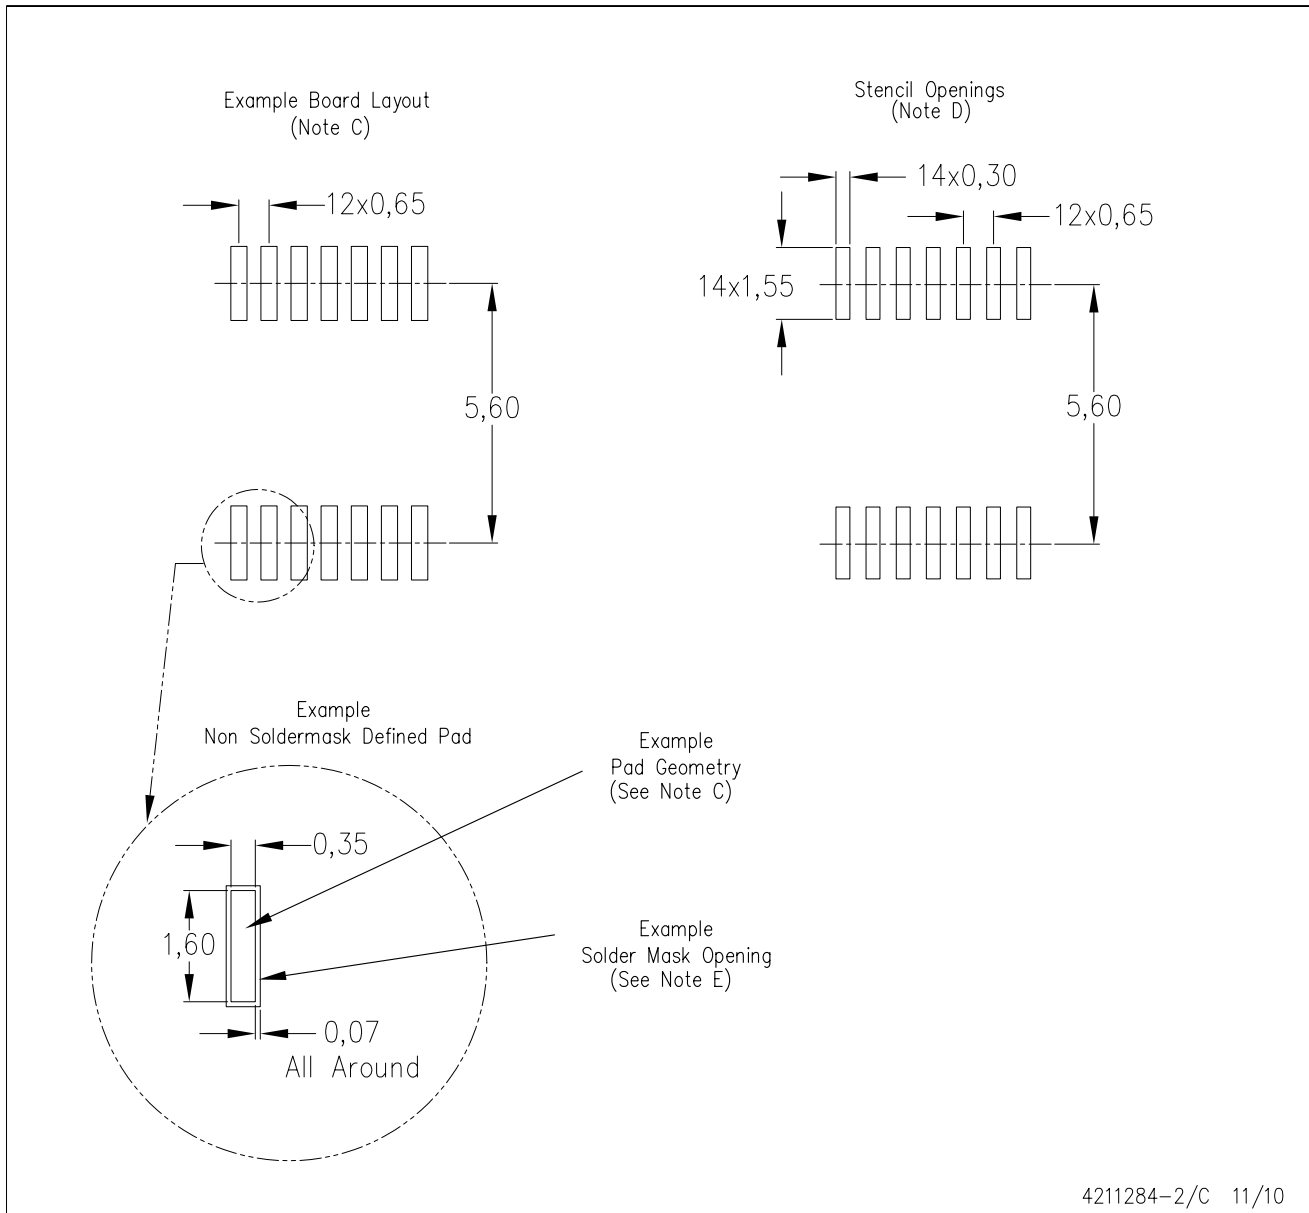

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                             |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| Audio                       | <a href="http://www.ti.com/audio">www.ti.com/audio</a>             |
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DLP® Products               | <a href="http://www.dlp.com">www.dlp.com</a>                       |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Transportation and Automotive | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |
| Wireless                      | <a href="http://www.ti.com/wireless-apps">www.ti.com/wireless-apps</a>                   |

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated